

Auxiliary Panel : PEX

Features

Auxiliary Panel is used as a supplementary product of the Control Panel to display the Fire signal and to issue an alarm in a separate location.

Specifications

Type	Auxiliary Panel for 5 to 40 Zones
Model Name	PEX - □G : Surface Mount Type PEX - □GU : Flush Mount Type
Number of Zones	05,10,15,20,25,30,35,40
Rated Operating Voltage	DC24V
Zone Indication Lamp	LED
Material	Body, Front Door, Vinyl chloride resin metal laminate sheet, 1.0mm Operation Panel : Steel, 1.0mm
Color	Body, Front Door : Munsell 2.5Y9/1 Operation Panel : Munsell N-1,0
Dimension	250mm(W) X 350mm(H) X 90mm(D)
Weight	Approx. 5.5Kg

Type	Auxiliary Panel for 50 to 210 Zones		
Model Name	PEX - □G : Surface Mount Type PEX - □GU : Flush Mount Type		
Number of Zones	50,60,70,80,90	100,110,120,130,140,150	160,170,180,190,200,210
Rated Operating Voltage	DC24V		
Zone Indication Lamp	LED		
Material	Body, Front Door : Steel, 1.6mm Operation Panel : Steel, 1.2mm		
Color	Body, Front Door : Equivalent to Munsell 2.5Y9/1 Operation Panel : Equivalent to Munsell 1.0		
Dimension	550mm(W) X 500mm(H) X 100mm(D)	550mm(W) X 700mm(H) X 100mm(D)	550mm(W) X 900mm(H) X 100mm(D)
Weight	Approx. 16Kg	Approx. 23Kg	Approx. 30Kg
Made	JAPAN		



PEX-5G to 40G



PEX-50G to 210G

HOCHIKI CORPORATION


SINGAPORE BRANCH OFFICE

629 Aljunied Road #03-16 Cititech Industrial Building
Singapore 389838
Tel : 65-6841-9728 Fax : 65-6841-9781
Email : hochiki@singnet.com.sg

HEAD OFFICE

10-43 Kamiosaki 2-Chome. Shinagawa-Ku,
Tokyo 141-8660, Japan
Tel : 81-(3)-3444-4116 Fax : 81-(3)-3444-4167
URL : www.hochiki.co.jp

PEX-5G to 40G

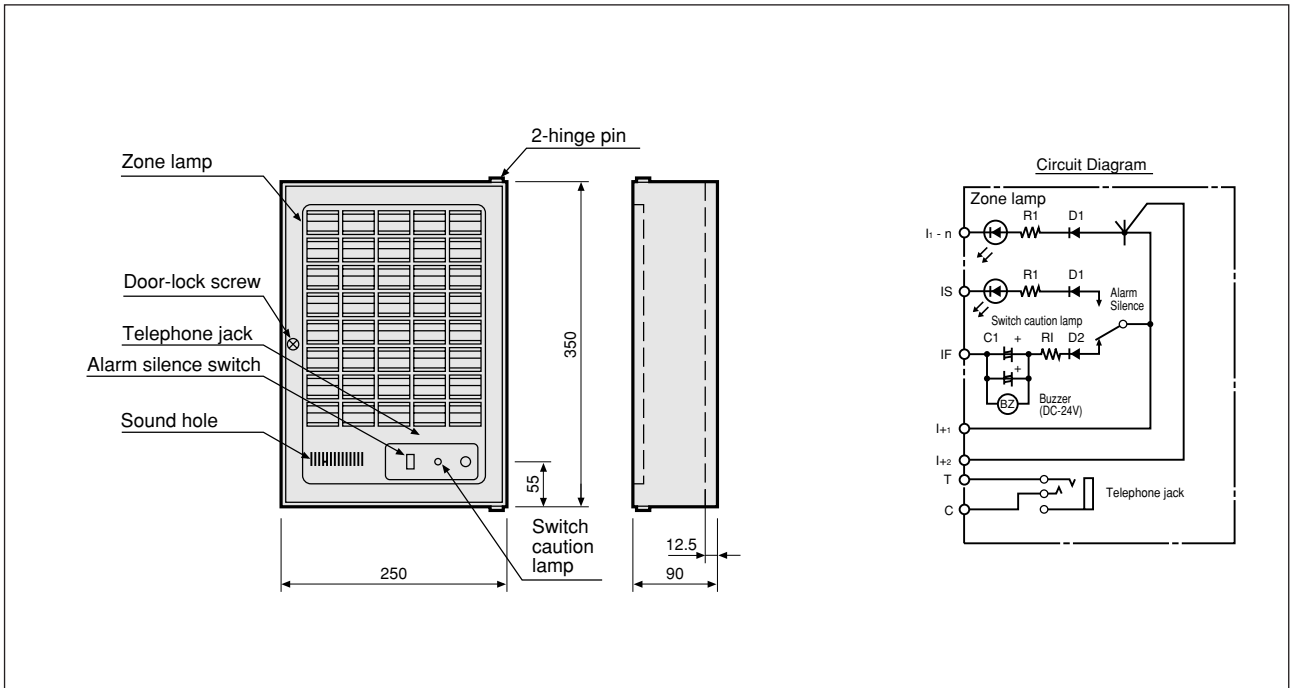

PEX-50G to 210G

